

DETAILS

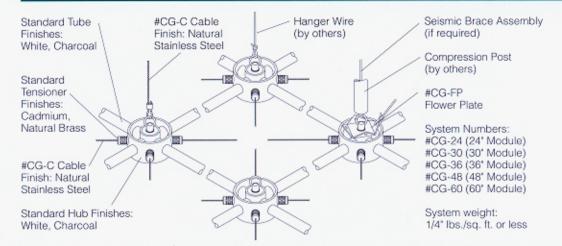

HUB ACCESSORIES

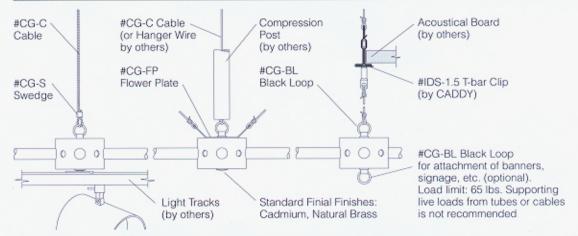

APPLICATION DATA

Standard Modules: Standard tube finishes: Standard hardware finishes: Tube materials: Cable material: Hub material: Hub flammability: Heat distortion temperature: 24", 30", 36", 48", 60" White, Charcoal Cadmium, Natural Brass Roll-formed Aluminum. 1/16" diameter Stainless Steel Glass-filled Thermoset Polyester Meets UL 94 V-0. 395° F

SUGGESTED SPECIFICATIONS

Furnish and install CableGrid Ceiling System (#CG-24, #CG-30, #CG-36, #CG-48, or #CG-60) manufactured by Ceiling Designs, Inc., and represented by (name, city and phone number of CDI sales representative) in all locations shown on the Plans.

Finishes: Tubes shall be in Standard (White, Charcoal). Hubs shall be in Standard (White, Charcoal). Hub hardware shall be in Standard (Cadmium, Natural Brass).

Hanging system: Each Hub shall be supported from the structure above by means of (#12 Prestraightened Steel Hanger Wire secured to the Hub Loop using three tight wrappings) or (#CG-C Stainless Steel Cable attached securely top and bottom using #CG-S Swedges (Note to installers: The use of Cable Cutter #C7 by FELCO, and lever type Swedge Crimper tool #32VC-VG by National Telephone & Supply Company are suggested to reduce installation time). All hangers shall drop plumb to the hubs. Where plumb hangers are not possible, wires or cables shall be evenly splayed, all in accordance with the manufacturer's Installation Instructions.

CEILING DESIGNS, INC.

11693 San Vicente Boulevard., #333 Los Angeles, California 90049 Phone: (310) 476-8729 FAX: (310) 472-5820